



Model P-6




Model P-6F

**Brand: Bend-Pak**  
**Model: P-6 / P-6F ( Flush-Mount Version )**  
**Description: Pit Lifts**

The original pad lift system designed for quick-lube facilities. The exclusive clear center design enables quick-lubes to offer fast and easy tire rotations. The flush mount version P-6F provides a clean, in-ground, flush mount appearance. Both lifts come standard with rubber tops and additional rubber lifting blocks.

- Open center design
- Low-profile
- Dual approach design
- 6,000 pound lifting capacity
- Electric/hydraulic power system
- Hands-free safety system
- Rubber lifting blocks included
- Heavy-duty steel channel frame

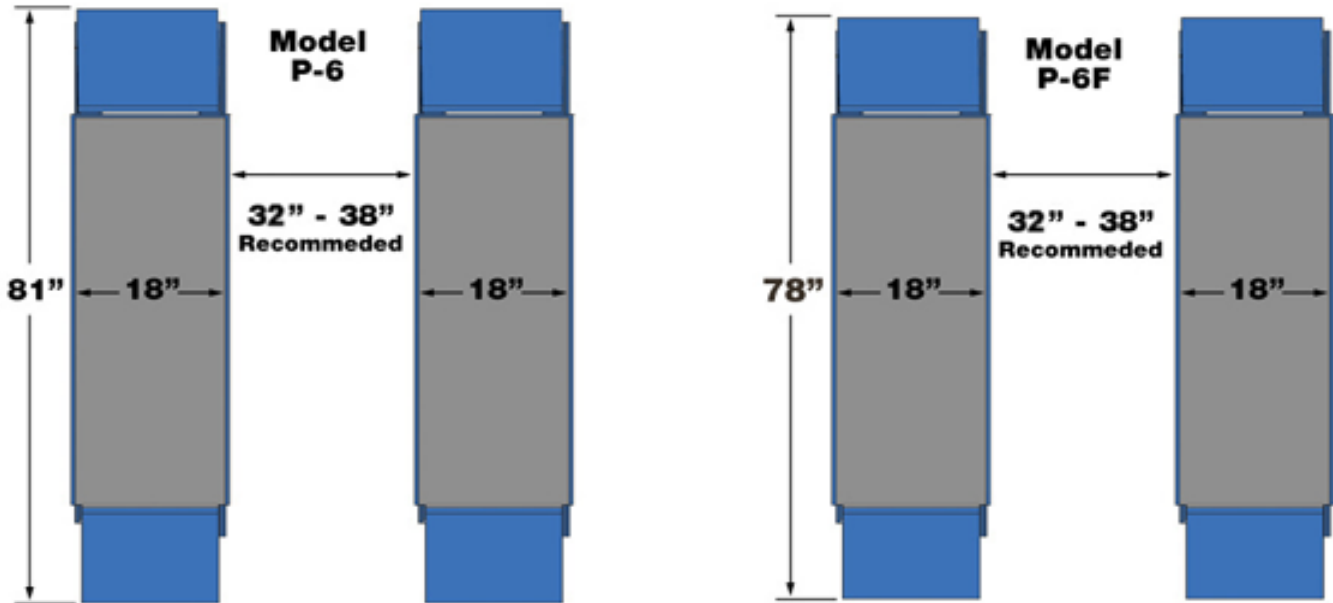

MODEL	P-6	P-6F
Style:	Low-Rise Pit Lift / Surface Mount	Low-Rise Pit Lift / Flush Mount
Lifting Capacity:	6,000 lbs. / 2722 Kg.	6,000 lbs. / 2722 Kg.
Lifting Height ( Less Lift Blocks ):	26" / 660 mm.	26" / 660 mm.
Lifting Height ( With Lift Blocks ):	29" / 737 mm.	29" / 737 mm.
Overall Pad Length	53" / 1346 mm.	53" / 1346 mm.
Overall Width	18" / 457 mm.	18" / 457 mm.
Overall Length	81" / 2057 mm.	78" / 1981 mm.
Lowered Height:	4" / 102 mm.	4" / 102 mm.
Lifting Time:	35 / Seconds	35 / Seconds
Motor (*)	110-220 VAC / 60 Hz. / 1Ph.	110-220 VAC / 60 Hz. / 1Ph.
* Special Voltages Available Upon Request.		
The design, material and specifications are subject to change without notice.		